



## MAXIMUM LEAF SIZES

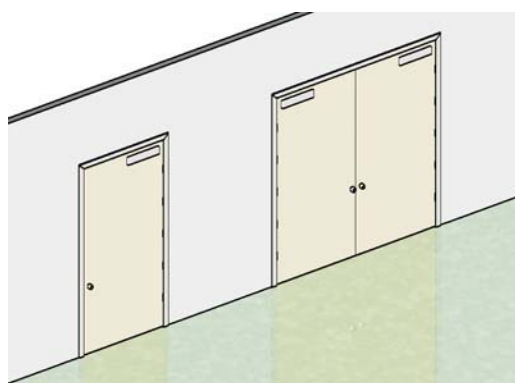

Clearances and hinge spacings to NZFD approved specifications

7mm Standard  
Maximum 10mm  
from top of floor  
covering to leaf

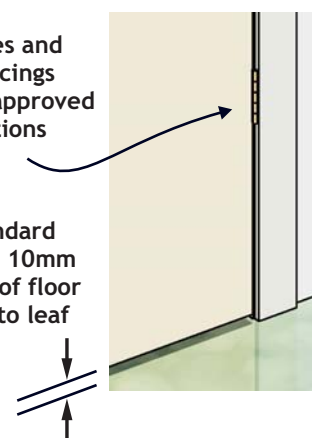

### Rating

### Maximum Leaf Size

|  |  |
|--|--|
| <p>■ <b>FRR up to NZFD30 and -/-/- Sm, Timber Leaf</b><br/>Hinged, standard range<br/>Special Hinged variants. Conditions apply*<br/>Double acting, standard range<br/>Special Double acting variants. Conditions apply*</p> | <p>2700 H x 1200 W<br/>3200 H x 1600 W<br/>2200 H x 1230 W<br/>2700 H x 1200 W</p> |
| <p>■ <b>NZFD45 to NZFD60 Timber Leaf</b><br/>Hinged, standard range<br/>Double acting, standard range</p>  | <p>2700 H x 1200 W<br/>2030 H x 1030 W</p>   |
| <p>■ <b>NZFD60E to NZFD240E** Mineral Core</b><br/>Hinged, standard range<br/>(push/pull maximum 2400 H)<br/>Special Hinged variants. Conditions apply*<br/>Double acting (up to -/120/30)</p>                               | <p>2700 H x 1200 W<br/>3000 H x 1500 W<br/>2700 H x 1200 W</p>                     |

Inclusion of sidelights or overlights will affect maximum leaf sizes.  
Refer to Sections 11 and 12.

\* Refer NZFD Sales Team for details.

\*\* Kickplates are recommended to cover joins in ply facings  
over 2400mm high if FRR is over 60 minutes.

Also available from  
**Metalbilt, Auckland**  
 Ph: 09-828 1167, Fx: 09-828 6358  
**Metalbilt, Wellington**  
 Ph: 04-568 2933, Fx: 04-568 7337  
**Metalbilt, Christchurch**  
 Ph: 03-338 2600, Fx: 03-338 4386

**NZ FIRE DOORS**  
 PO Box 12709, Auckland 1642  
 89 Gavin Street, Ellerslie  
 Ph: 09-579 8895  
 Fx: 09-579 2933  
 Email: sales@nzfiredoors.co.nz  
 www.nzfiredoors.co.nz  
 Norfolk Building Products Limited