

**Trim Size is taken to be the wall opening size.**  
**H and W Dimension added to leaf size to give trim size.**

Door Code	Timber Frames		Steel Frames Timber or Steel Stud		Steel Frames Masonry Walls	
	H	W	H	W	H	W
Non rated	+33	+52	+48	+82	+53	+92
-/-/-5m	+45	+76	+48	+82	+53	+92
NZFD30	+45	+76	+48	+82	+53	+92
DA* Floor closer	+45	+76	---	---	---	---
DA* Transom closer	+75	+76	---	---	---	---
NZFD45	+50	+86	+48	+82	+53	+92
NZFD60	+50	+86	+48	+82	+53	+92
DA* Floor closer	+50	+96	---	---	---	---
DA* Transom closer	+75	+96	---	---	---	---
NZFD60E to NZFD240E	---	---	+48	+82	+53	+92
NZFD60E-DA to NZFD120E-DA	---	---	+51	+74	+56	+84

Allows for standard 7mm floor gap. Add thickness of floor coverings to height dimension if applicable.


■ For double leaf doors add extra leaf width plus 4mm.

Dimensions may vary if sidelights or overlights are used. Refer Sections 11 and 12.

Sills to be non-combustible for -/60/60 or greater FRR. Refer AS/NZS1905.1 5.2.2

Refer to Section 6 for frame thicknesses.

\* DA = Double Acting door of required rating.

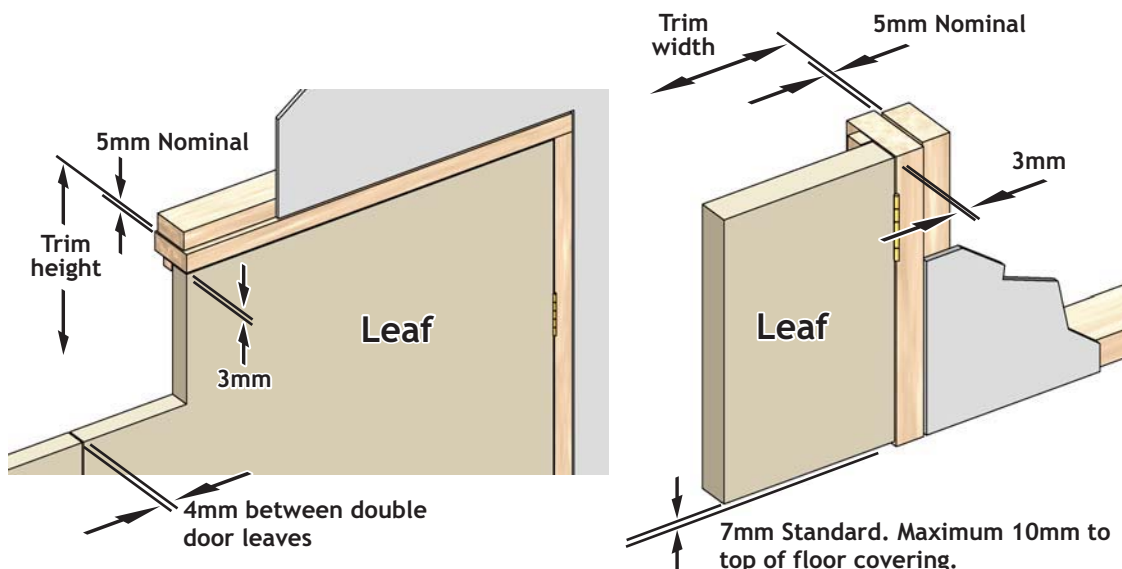

Also available from  
**Metalbilt, Auckland**  
 Ph: 09-828 1167, Fx: 09-828 6358  
**Metalbilt, Wellington**  
 Ph: 04-568 2933, Fx: 04-568 7337  
**Metalbilt, Christchurch**  
 Ph: 03-338 2600, Fx: 03-338 4386

**NZ FIRE DOORS**  
 PO Box 12709, Auckland 1642  
 89 Gavin Street, Ellerslie  
 Ph: 09-579 8895  
 Fx: 09-579 2933  
 Email: sales@nzfiredoors.co.nz  
 www.nzfiredoors.co.nz  
 Norfolk Building Products Limited